

## 15W Medical desk top switch mode power supplies

MODEL	INPUT	OUTPUT	
MIX15-0325	AC100V~120V (50/60Hz)	3.0V 2.5A	
MIX15-3325		3.3V 2.5A	
MIX15-0525		5.0V 2.5A	
MIX15-0623		6.0V 2.3A	
MIX15-7520		7.5V 2.0A	
MIX15-0916		9.0V 1.6A	
MIX15-1015		AC100V~240V (50/60Hz)	10V 1.5A
MIX15-1212			12V 1.25A
MIX15-1510			15V 1.0A
MIX15-2406			24V 0.65A
MIX15-4803			48V 0.3A

\*\*\* When X=1, It Indicates Input Voltage AC100V-120V,50/60Hz

\*\*\* When X=3, It Indicates Input Voltage AC100V-240V,50/60Hz

### FEATURE:


- Constant Voltage Mode
- Lower Leakage Current Under 0.1mA
- Super Mini Size and Easy Portable
- Light & Convenient Plug In

### APPLICATION:

- Medical Device Use

### INPUT/OUTPUT SPECIFICATIONS:

Input Voltage:	AC100V-120V, AC100V-240V, 50/60Hz
Range Voltage:	AC 90V-132V,AC100V-264V,47/63Hz
Output Power:	15W
Output Voltage:	3V-48V
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

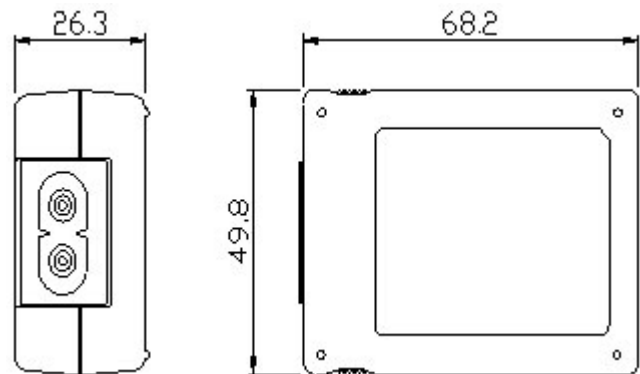

DIMENSION: L\*W\*H: 68.2\*49.8\*26.3

**GENERAL SPECIFICATIONS:**

Operating Temperature:	0 ~ 40°C
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 85 °C
Withstanding Voltage:	UMI115 AC 2000V/Min (between Input & Output),5mA(Max.) UMI315 AC 3000V/Min (between Input & Output),5mA(Max.)
Insulation Resistance:	DC500V 100MΩ(Min.) (between Input & Output)
Efficiency:	70% Min

**SAFETY:**

- MI115 : MEET IEC 60601,UL60601
- MI315 : MEET IEC 60601,EN60601,UL60601