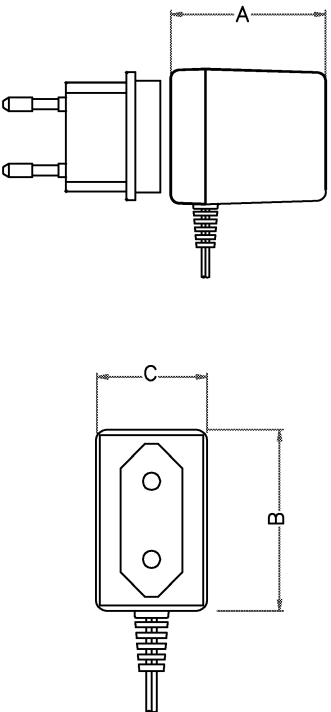
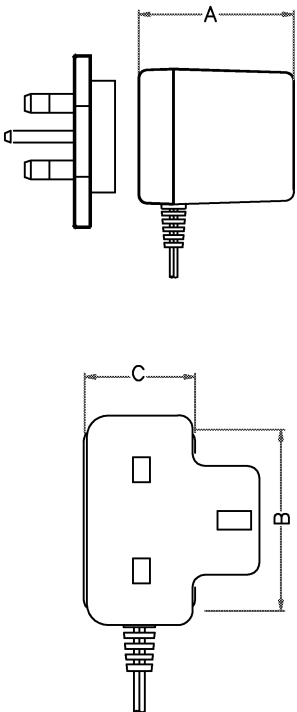
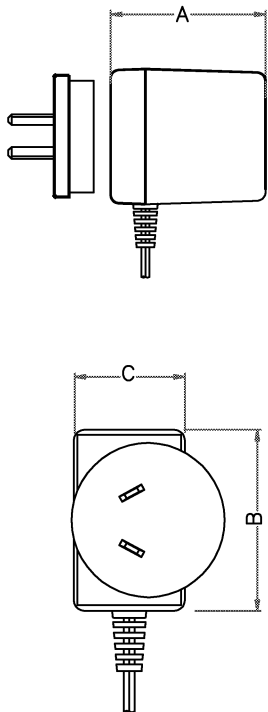
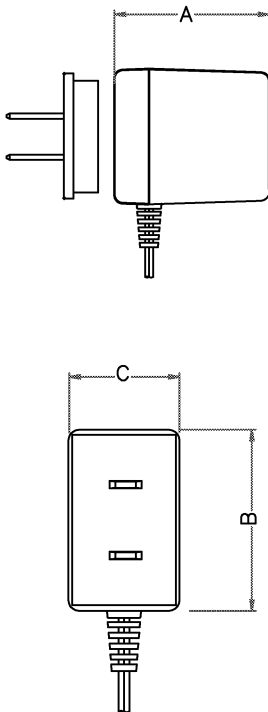


# Switching Mobile Power Supply (Compact C-Series) with Changeable Plugs

							
Plug	Europe	UK	Australia	USA/China			
A	50.00	50.00	50.00	50.00			
B	44.00	44.00	44.00	44.00			
C	29.00	29.00	29.00	29.00			

## Technical Specification

Operating Input Voltage Range	100~240V AC
Output Voltage Range	DC 3.0V ~ DC 12V
Output Current / Power Range	1000mA Max / 6.0W Max
Output Voltage Regulation	Less Than 5% of Rated Output Voltage
Limited Current Range	Less Than 5% of Output Current Rating
Ripple & Noise	Less than 1% of Output Voltage Rating
Efficiency	Higher Than 70% @ Maximum Load
Output Cable	1800mm with DC plug
Safety Approvals	UL/cUL, CE, GS, Semko, C-tick, Q-Nr, Nemko
Safety Standard	EN60950/ UL1950/ AS60950/ EN61558/ UL1310/ AS61558/ EN60065/ UL6500/ AS60065

EMC / FCC Standard = EN55022/ EN61000/ AS3548/ FCC part 15