


## Green Mode

Meet CEC Regulations & RoHS Compliance  
No Load Power Consumption less than 0.5W



## ADAPTER-18W Wallmount / EUROPEAN

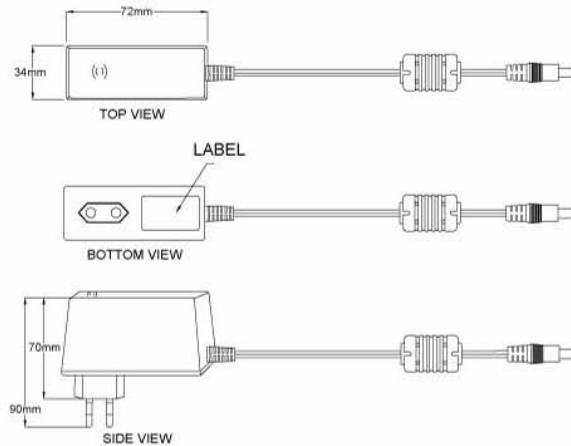

### FEATURE

<b>Wallmount Type</b>	<b>EUROPEAN</b>
Input Range	90~264V/47~63 Hz
Output	4.5V~24V / 0.6~3.5A( 20W max.)
Efficiency	76% min. (Meet CEC)
Protection	Short circuit protection / Over Voltage Protection / Over Current Protection
Load Regulation	±5%
Leakage Current	Less than 0.25mA
M.T.B.F.	100,000 hours min. at 25°C, by MIL-HDBK-217F
Cable type	UL2468 / 18AWG or 20AWG Ferrite Core (option)
Dimension	72(L) x 34(W) x 70(H) (case) / 90 (H) (Total)mm
Weight (reference)	154 g (reference)
APPLICATION	Broadband & Network Equipment, Wireless Products, Portable Equipment
<b>SAFETY &amp; EMI</b>	
SAFETY	CB/GS/LPS
EMI	CE
<b>ENVIRONMENTAL</b>	
Operating Temperature	0~+40°C
Storage Temperature	-20~+60°C
Relative Humidity	(operating) 20~80% RH / ( storage ) 10~90% RH

### RULE OF THE MODEL NAME

NO	Model Name	O/P Voltage(V)	O/P Current(A)	PO(W)
1	TD-04535E	4.5	3.5	15.75
2	TD-05025E	5.0	2.5	12.50
3	TD-05030E	5.0	3.0	15.00
4	TD-05035E	5.0	3.5	17.50
5	TD-06025E	6.0	2.5	15.00
6	TD-06030E	6.0	3.0	18.00
7	TD-07025E	7.0	2.5	17.50
8	TD-07525E	7.5	2.5	18.75
9	TD-09015E	9.0	1.5	13.50
10	TD-09022E	9.0	2.2	19.80
11	TD-10019E	10.0	1.9	19.00
12	TD-12012E	12.0	1.2	14.40
13	TD-12016E	12.0	1.6	19.20

### AC Plug : [E- EUROPEAN]

NO	Model Name	O/P Voltage(V)	O/P Current(A)	PO(W)
14	TD-13510E	13.5	1.0	13.50
15	TD-13514E	13.5	1.4	18.90
16	TD-15010E	15.0	1.0	15.00
17	TD-15013E	15.0	1.3	19.50
18	TD-16010E	16.0	1.0	16.00
19	TD-16012E	16.0	1.2	19.20
20	TD-18008E	18.0	0.8	14.40
21	TD-18011E	18.0	1.1	19.80
22	TD-20007E	20.0	0.7	14.00
23	TD-20010E	20.0	1.0	20.00
24	TD-24006E	24.0	0.6	14.40
25	TD-24008E	24.0	0.8	19.20